



TO-92 Encapsulate Three-terminal Voltage Regulator

CJ79L15 Three-terminal positive voltage regulator


FEATURES

Maximum Output current

I_{OM} : 100 mA

Output voltage

V_O : -15 V

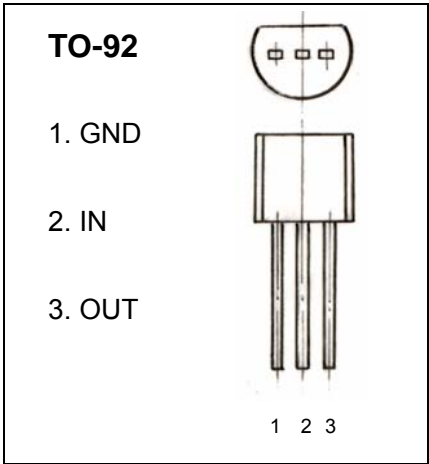


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unlts
Input Voltage	V_i	-35	V
Operating Junction Temperature Range	T_{OPR}	-20~+120	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_{is}=-23V, I_o=40mA, 0^{\circ}C<T_j<125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^{\circ}C$	-14.4	-15	-15.6	V
		$-17.5V\leq V_i\leq -30V, I_o=1mA\sim 40mA$	-14.25	-15	-15.75	V
		$-17.5V\leq V_i\leq -30V, I_o=1mA\sim 70mA$	-14.25	-15	-15.75	V(note)
Load Regulation	ΔV_o	$T_j=25^{\circ}C, I_o=1mA\sim 100mA, V_i=-23V$		25	150	mV
		$T_j=25^{\circ}C, I_o=1mA\sim 40mA, V_i=-23V$		15	75	mV
Line regulation	ΔV_o	$-17.5V\leq V_i\leq -30V, T_j=25^{\circ}C, I_o=40mA$		65	300	mV
		$-20V\leq V_i\leq -30V, T_j=25^{\circ}C, I_o=40mA$		5	250	mV
Quiescent Current	I_q	$T_j=25^{\circ}C$			6.5	mA
Quiescent Current Change	ΔI_q	$-20V\leq V_i\leq -30V, I_o=40mA$			1.5	mA
	ΔI_q	$1mA\leq I_o\leq 40mA, V_i=-23V$			0.1	mA
Output Noise Voltage	V_N	$10Hz\leq f\leq 100KHz$		90		μV
Ripple Rejection	RR	$-18.5V\leq V_i\leq -28.5V, f=120Hz, 25^{\circ}C\leq T_j\leq 125^{\circ}C$	34	39		dB
Dropout Voltage	V_d	$T_j=25^{\circ}C$		1.7		V

TYPICAL APPLICATION

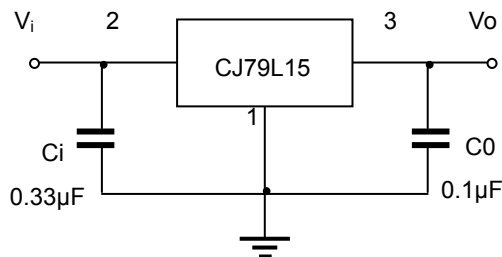

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.